




**2016 CA RESIDENTIAL
CODE R302.11 - R302.14,
R1003.19**

**2016
CA MECHANICAL CODE
802.6**

TERMINATE IN ACCORDANCE WITH SECTION 806

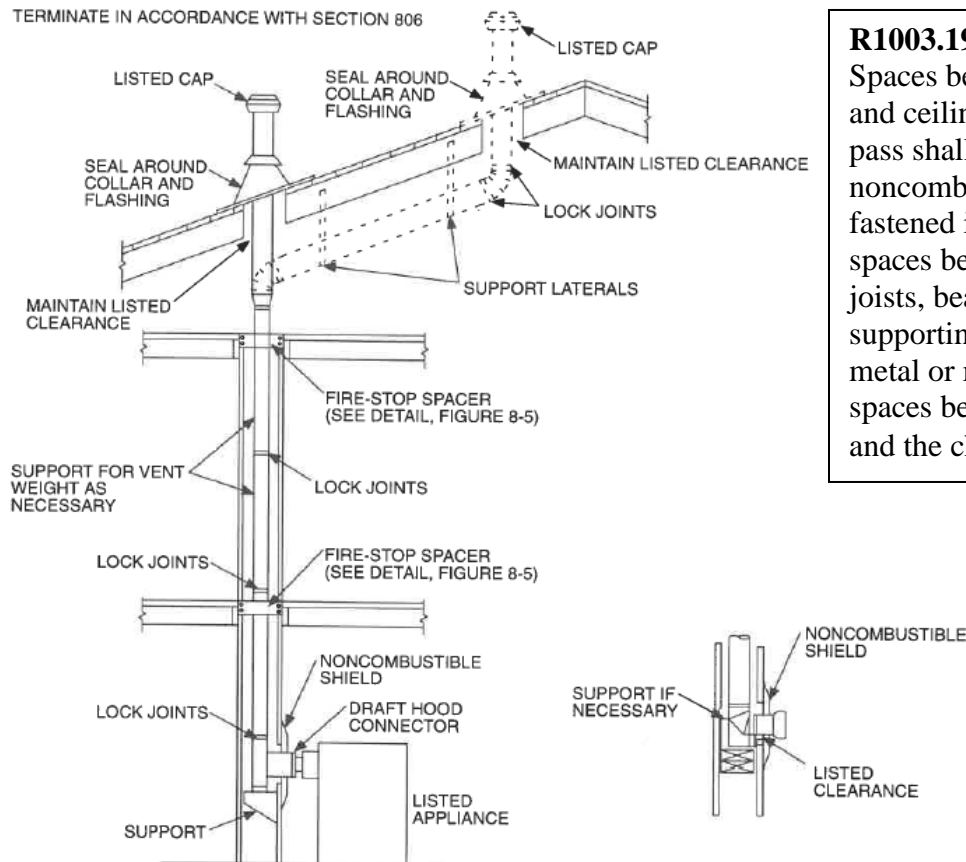


TYPICAL TYPE B ROUND VENTING SYSTEM

FIGURE 8-4

TERMS OF LISTING: B-1
TYPE B ROUND

THE NUMBER FOLLOWING THE B
IS THE CLEARANCE IN INCHES

FIRE-STOP SPACERS TO BE USED
AT EVERY FLOOR OR CEILING

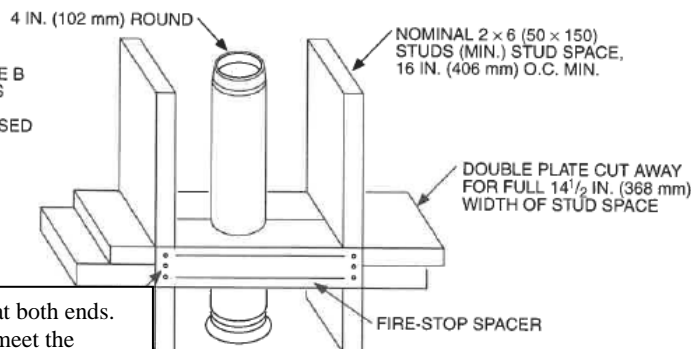

Fire stop spacer nailed to plate at both ends.
The spacer illustrated does not meet the
requirements of CBC Section 2308.9.8

TYPICAL TYPE B ROUND VENTING SYSTEM FIRE-STOP SPACER

R1003.19 Chimney fireblocking.

Spaces between chimneys and floors and ceilings through which chimneys pass shall be fireblocked with noncombustible material securely fastened in place. The fireblocking of spaces between chimneys and wood joists, beams or headers shall be self-supporting or be placed on strips of metal or metal lath laid across the spaces between combustible material and the chimney.